

BST30-150W-3G

DC-3GHz Fixed Attenuator

Data Sheet

I. Electrical Performance Table

Table 1.

PARAMETER NAME	VALUE
Frequency range	DC – 3GHz
VSWR	1.25 Max
Input Power	150W
Attenuation	30dB
Error of Attenuation	±1.0dB
Temperature Coefficient	< 150ppm/°C
Working Temperature Range	-55°C ~ +150°C
Impedance	50 Ω

II. Physical parameters

Unit: mm

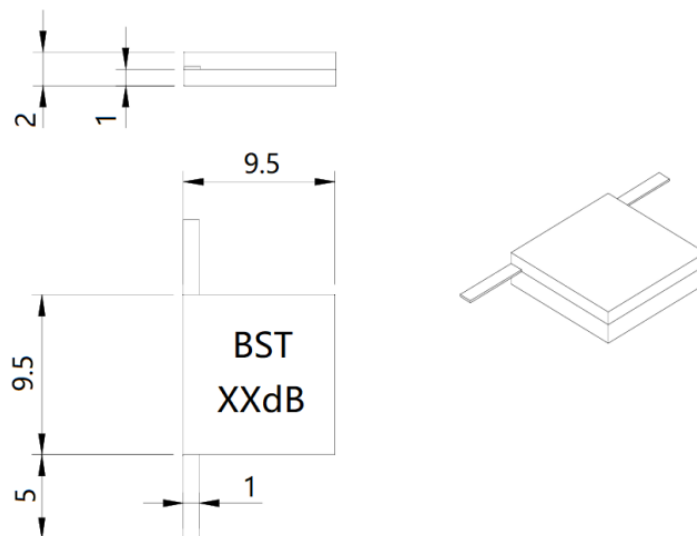


Figure 1